



YANMAR

TNV DI Series Industrial Diesel Engine



Image shown may not be actual engine

Features

Clean Emissions

Building off the proven TNE design, Yanmar has achieved superior exhaust emissions by improving the combustion chamber and fuel injection equipment design. Engines are compliant with 2008 EPA Tier 4 and EU stage III A exhaust emissions regulations.

Reliable and Durable

The TNV engines now proudly take up the running as Yanmar's premium small industrial diesel. They offer even more enhanced durability due to better block cooling, a stiffer crank and pistons, finer tolerance in the journal, and more. CAE analysis has brought lower vibrations and higher strength to the mounting structure for even better reliability in heavy-duty jobs.

Fuel Delivery and Economy

A newly designed, in-line MP type fuel injector pump is utilized to assure more precise fuel delivery and control. The result is reduced emissions, improved performance over a wide range of applications and good fuel economy which assures that Yanmar's reputation for superior starting characteristics continues.

Noise Level Reduction

Yanmar's original CAE techniques have optimized the stiffness, minimized transformation, and reduced radiant noise in the cylinder block. Gear noise reduction is achieved through an improved gear tooth profile resulting in less mechanical noise.

Additional Information

Yanmar America Corp
951 Corporate Grove Drive
Buffalo Grove, IL 60089
www.yanmar.com

Distributed By:

4TNV98T-ZGGE General Specification 67.2 HP (50.1 kW) @ 1800 rated rpm*

Type	• • • 4 Cylinder, 4-Cycle, Liquid Cooled Diesel Engine
Bore	• • • • • 98 mm
Stroke	• • • • • 110 mm
Displacement	• • • • • 3.319 L
Aspiration	• • • • • Turbocharged
Combustion System	• • • • • Direct Injection
Rotation (from flywheel end)	• • • • • Counterclockwise
Dry Weight	• • • • • 568 lbs (257 kg)

Standard Engine Equipment

General

Intake & Exhaust Manifold
Exhaust Manifold Gasket (shipped loose)

Lubrication System

4.5 L Capacity Shallow Oil Pan
Trochoid Oil Pump
Paper Element Oil Filter
Oil Pressure Switch
Crankcase Breather, Closed Type

Electrical System

12V, 40 Amp Alternator
12V Starter Motor
12V, 500W Air Heater
Preheat Relay (shipped loose)
Preheat Timer, 15 second (shipped loose)
Stop Solenoid Timer, 1 second (shipped loose)

Fuel System

In-line MP4 Fuel Injection Pump
12V Electric Fuel Pump (shipped loose)
Paper Element Fuel Filter
Water Separator (shipped loose)
Stop Solenoid, Integral to Fuel Injection Pump (shipped loose)

Cooling System

Water Pump, Belt Driven
6-Blade, 430mm Cooling Fan—Puller Type
70° F (21° C) Thermostat
Temperature Switch
Fan Belt

Power Take Off

Flywheel, SAE 11 1/2"
Flywheel Housing, SAE #3




4TNV98T-ZGGE

Industrial Diesel Engine

Performance Data

Please Contact Yanmar for Details

Dimensions

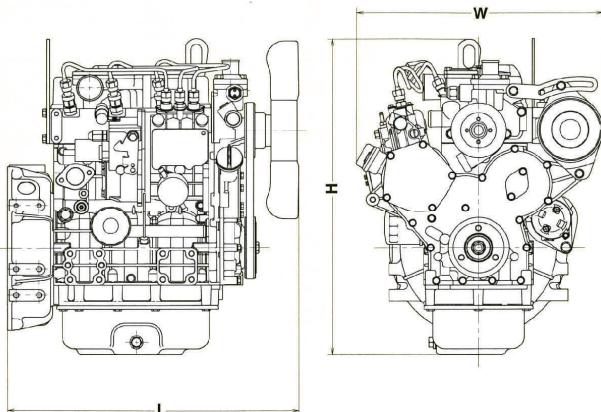

Length	30.0 in (763 mm)
Width	21.2 in (540 mm)
Height	32.9 in (838 mm)

Note: Dimensions depend on final specifications.

kW to Hp conversion used is expressed as: HP = (kW value) x 1.34

Rated Speed (rpm)	Net rated kW	Net rated HP	Max. Torque (ft-lb)
1800	50.1	67.2	Call Yanmar

Ratings Definitions and Conditions

*Rated power listed is NET engine output. The engine operating environment and driven machine conditions must be studied carefully when selecting an engine in order to ensure correct engine selection, maximize engine performance, extend engine service life and improve machine capacity.

Consult the TNV Application Manual for additional engine ratings and engine application information.

Application standards for Yanmar industrial engines: Inlet air standard conditions with a total barometric pressure of 100kPa (29.5 in. Hg), with a vapor pressure of 1 kPa (.295 in. Hg), and 25°C (77°F).

Materials and specifications herein are intended to serve as a guide in engine selection and subject to change without notice. The International System of Units (SI) is used in this publication. Yanmar and its logos, as well as corporate identity used herein, are trademarks of Yanmar and may not be used without permission.